


GACHES ELECTRIQUES ROUREG™
ELECTRIC STRIKES ROUREG™
ROUREG™ ELEKTRO-TÜRÖFFNER
ROUREG™ DEUROPENER



● de série / standard execution
Standardausführung / standard uitvoering
— non disponible / not available
nicht verfügbar / niet beschikbaar

ST_SE000222_RANGE_A_100601

RACCORDEMENT
CONNECTING
ANSCHLUßPLAN
AANSLUITING



 h x l x p H x L x D H x B x T H x B x D	1	70,8 x 20,5 x 29,5 mm sans contact de signalisation - without microswitch ohne Rückmeldekontakt - zonder signaleringscontact			 0,2 kg	 500 DaN	
	2	79,8 x 20,5 x 29,5 mm avec contact de signalisation - with microswitch mit Rückmeldekontakt - met signaleringscontact					
MODELE MODEL MODELL							
1 ROUREG A EMISSION - FAIL SECURE - ARBEITSSSTROM - ARBEIDSSSTROOM							
SE000222	1	—	—	—	8/12 V AC/DC	700 mA	
SE000225	1	—	—	—	12 V DC	200 mA	
SE000227	1	—	—	—	24 V AC/DC	450 mA	
SE000226	1	—	—	—	24 V DC	120 mA	
SE000243	1	●	—	—	12 V DC	200 mA	
SE000244	1	●	—	—	24 V DC	120 mA	
SE000228	1	—	●	—	8/12 V AC/DC	700 mA	
SE000231	1	—	●	—	12 V DC	200 mA	
SE000229	1	—	●	—	24 V AC/DC	450 mA	
SE000232	1	—	●	—	24 V DC	120 mA	
SE000237	1	●	●	—	12 V DC	200 mA	
SE000238	1	●	●	—	24 V DC	120 mA	
AVEC CONTACT DE SIGNALISATION - WITH MICROSWITCH - MIT RÜCKMELDEKONTAKT - MET SIGNALERINGSCONTACT							
SE000246	2	—	—	125V AC - 0,1 A 12V DC - 2A	8/12 V AC/DC	700 mA	
SE000249	2	—	—	125V AC - 0,1 A 12V DC - 2A	12 V DC	200 mA	
SE000250	2	—	—	125V AC - 0,1 A 12V DC - 2A	24 V DC	120 mA	
SE000251	2	—	—	125V AC - 0,1 A 12V DC - 2A	24 V AC/DC	450 mA	
SE000261	2	●	—	125V AC - 0,1 A 12V DC - 2A	12 V DC	200 mA	
SE000262	2	●	—	125V AC - 0,1 A 12V DC - 2A	24 V DC	120 mA	
2 ROUREG A EMISSION + CONTACT STATIONNAIRE - FAIL SECURE + MECHANICAL MEMORY ARBEITSSSTROM + ARRETIERUNG - ARBEIDSSSTROOM + PULSCONTACT							
SE000264	1	—	—	—	8/12 V AC/DC	700 mA	
SE000267	1	—	—	—	24 V AC/DC	450 mA	
SE000270	1	—	●	—	8/12 V AC/DC	700 mA	
SE000273	1	—	●	—	24 V AC/DC	450 mA	
3 ROUREG A RUPTURE - FAIL SAFE - RUHESTROM - RUSTSTROOM							
SE000291	1	—	—	—	12 V DC	200 mA	
SE000292	1	—	—	—	24 V DC	120 mA	
SE000297	1	●	—	—	12 V DC	200 mA	
SE000298	1	●	—	—	24 V DC	120 mA	
AVEC CONTACT DE SIGNALISATION - WITH MICROSWITCH - MIT RÜCKMELDEKONTAKT - MET SIGNALERINGSCONTACT							
SE000303	2	—	—	125V AC - 0,1 A 12V DC - 2A	12 V DC	200 mA	
SE000304	2	—	—	125V AC - 0,1 A 12V DC - 2A	24 V DC	120 mA	
SE000309	2	●	—	125V AC - 0,1 A 12V DC - 2A	12 V DC	200 mA	
SE000310	2	●	—	125V AC - 0,1 A 12V DC - 2A	24 V DC	120 mA	

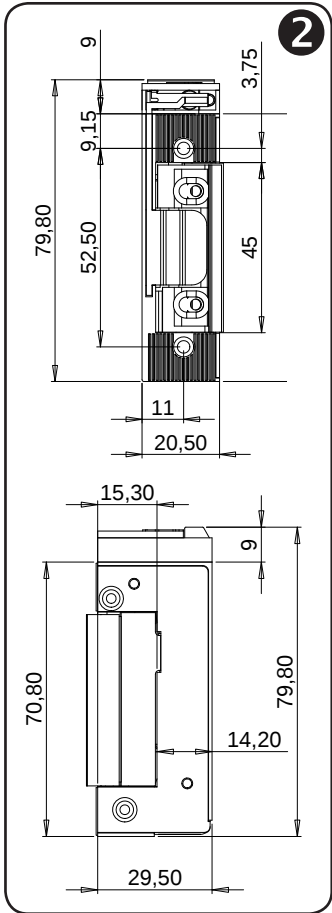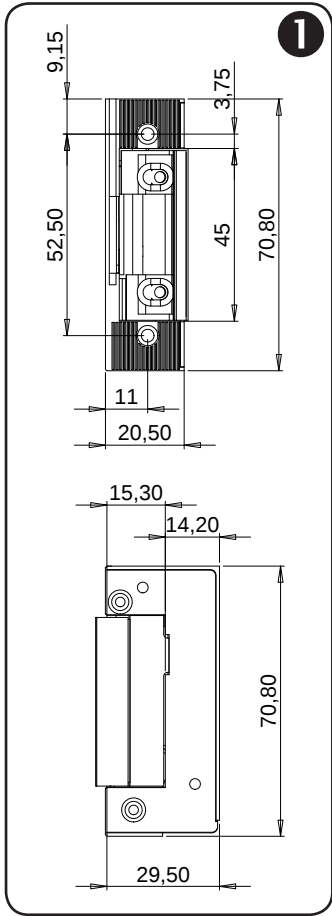

SEWOSY® SEWOSY se réserve le droit de modifier les caractéristiques techniques et tarifaires, la forme et les dimensions de tous les modèles, sans préavis.
SEWOSY reserve the right to go ahead with any modifications of models or features or prices without forewarning.
Änderungen des Lieferprogrammes durch technische Weiterentwicklungen sowie Preisänderungen behalten wir uns vor.
SEWOSY behoudt zich het recht akkoord te gaan met veranderingen van de prijzen of de modellen zonder vooraf te waarschuwen.

F-67170 BERNOLSHEIM Tél. : +33 (0)3.88.59.32.20 Fax : +33 (0)3.88.59.32.19 info@sewosy.com www.sewosy.eu