

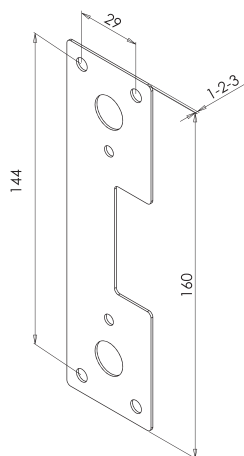
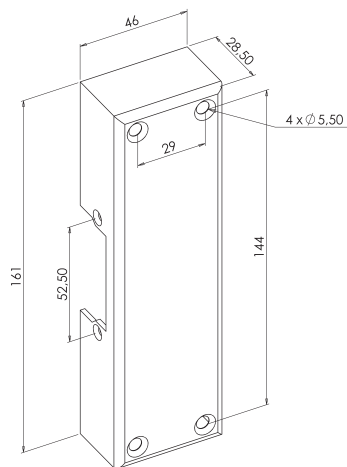
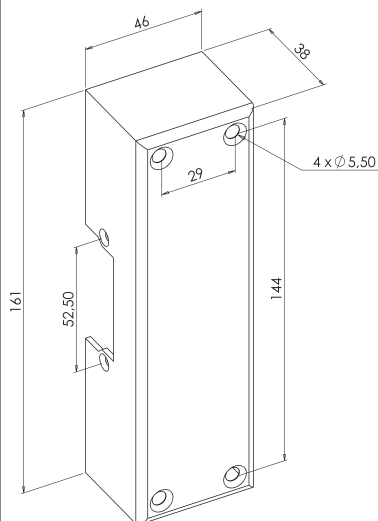
MODE D'EMPLOI
INSTALLATION INSTRUCTIONS
BEDIENUNGSANLEITUNG
GEBUIKSAANWIJZING

ST_SE1APPM_RANGE_A_120206

GACHES ELECTRIQUES PANIC PM & GM
ELECTRIC STRIKES PANIC PM & GM
PANIC PM & GM ELEKTRO-TÜRÖFFNER
PANIC PM & GM DEUROPENER


 1 161 x 46 x 28,5 mm PM petit modèle profondeur 28,5 mm - small size 28,5 mm depth Gehäusetiefe: 28,5 mm - kleine behuizing : 28,5 mm depte				 700 DaN					
Y x X x Z 2 161 x 46 x 38 mm GM grand modèle profondeur 38 mm - large size 38 mm depth Gehäusetiefe: 38 mm - grote behuizing : 38 mm depte									
MODELE MODEL MODELL				 1 x 1 mm 1 x 2 mm 2 x 3 mm	ouvert / fermé open / closed offen / geschlossen open / gesloten				
1 PANIC PM A EMISSION - FAIL SECURE - ARBEITSSTROM - ARBEIDSSTROOM									
SE1APPM		1	0,9 kg	●		12 V AC/DC		500 mA	
SE1APPM12		1	0,9 kg	●		12 V DC		200 mA	
SE1APPM24		1	0,9 kg	●		24 V DC		150 mA	
AVEC CONTACT DE SIGNALISATION - WITH MICROSWITCH - MIT RÜCKMELDEKONTAKT - MET SIGNALERINGSCONTACT									
SE1APCPM		1	0,9 kg	●	125V AC - 1 A 30V DC - 0,5 A	12 V AC/DC		500 mA	
SE1APCPM12		1	0,9 kg	●		12 V DC		200 mA	
SE1APCPM24		1	0,9 kg	●		24 V DC		150 mA	
3 PANIC PM A RUPTURE - FAIL SAFE - RUHESTROM - RUSTSTROOM									
SE3APPM12		1	1 kg	●		12 V DC		200 mA	
SE3APPM24		1	1 kg	●		24 V DC		150 mA	
AVEC CONTACT DE SIGNALISATION - WITH MICROSWITCH - MIT RÜCKMELDEKONTAKT - MET SIGNALERINGSCONTACT									
SE3APCPM12		1	1 kg	●	125V AC - 1 A 30V DC - 0,5 A	12 V DC		200 mA	
SE3APCPM24		1	1 kg	●		24 V DC		150 mA	

1 PANIC GM A EMISSION - FAIL SECURE - ARBEITSSTROM - ARBEIDSSTROOM						
SE1APGM	②	0,6 kg	—		12 V AC/DC	500 mA
SE1APGM12	②	0,6 kg	—		12 V DC	200 mA
SE1APGM24	②	0,6 kg	—		24 V DC	150 mA
AVEC CONTACT DE SIGNALISATION - WITH MICROSWITCH - MIT RÜCKMELDEKONTAKT - MET SIGNALERINGSCONTACT						
SE1APCGM	②	0,6 kg	—	125V AC - 1 A 30V DC - 0,5 A	12 V AC/DC	500 mA
SE1APCGM12	②	0,6 kg	—		12 V DC	200 mA
SE1APCGM24	②	0,6 kg	—		24 V DC	150 mA
3 PANIC GM A RUPTURE - FAIL SAFE - RUHESTROM - RUSTSTROOM						
SE3APGM12	②	0,6 kg	—		12 V DC	200 mA
SE3APGM24	②	0,6 kg	—		24 V DC	150 mA
AVEC CONTACT DE SIGNALISATION - WITH MICROSWITCH - MIT RÜCKMELDEKONTAKT - MET SIGNALERINGSCONTACT						
SE3APCGM12	②	0,6 kg	—	125V AC - 1 A 30V DC - 0,5 A	12 V DC	200 mA
SE3APCGM24	②	0,6 kg	—		24 V DC	150 mA

PM**1****GM****2**

DIMENSIONS
ABMESSUNGEN
AFMETINGEN

RACCORDEMENT
CONNECTION
ANSCHLUßBELEGUNG
AANSLUITING



contact
Kontakt