


Cylinder Lock with Handle


L11-10-01




AXELENT AB
WWW.AXELENT.COM

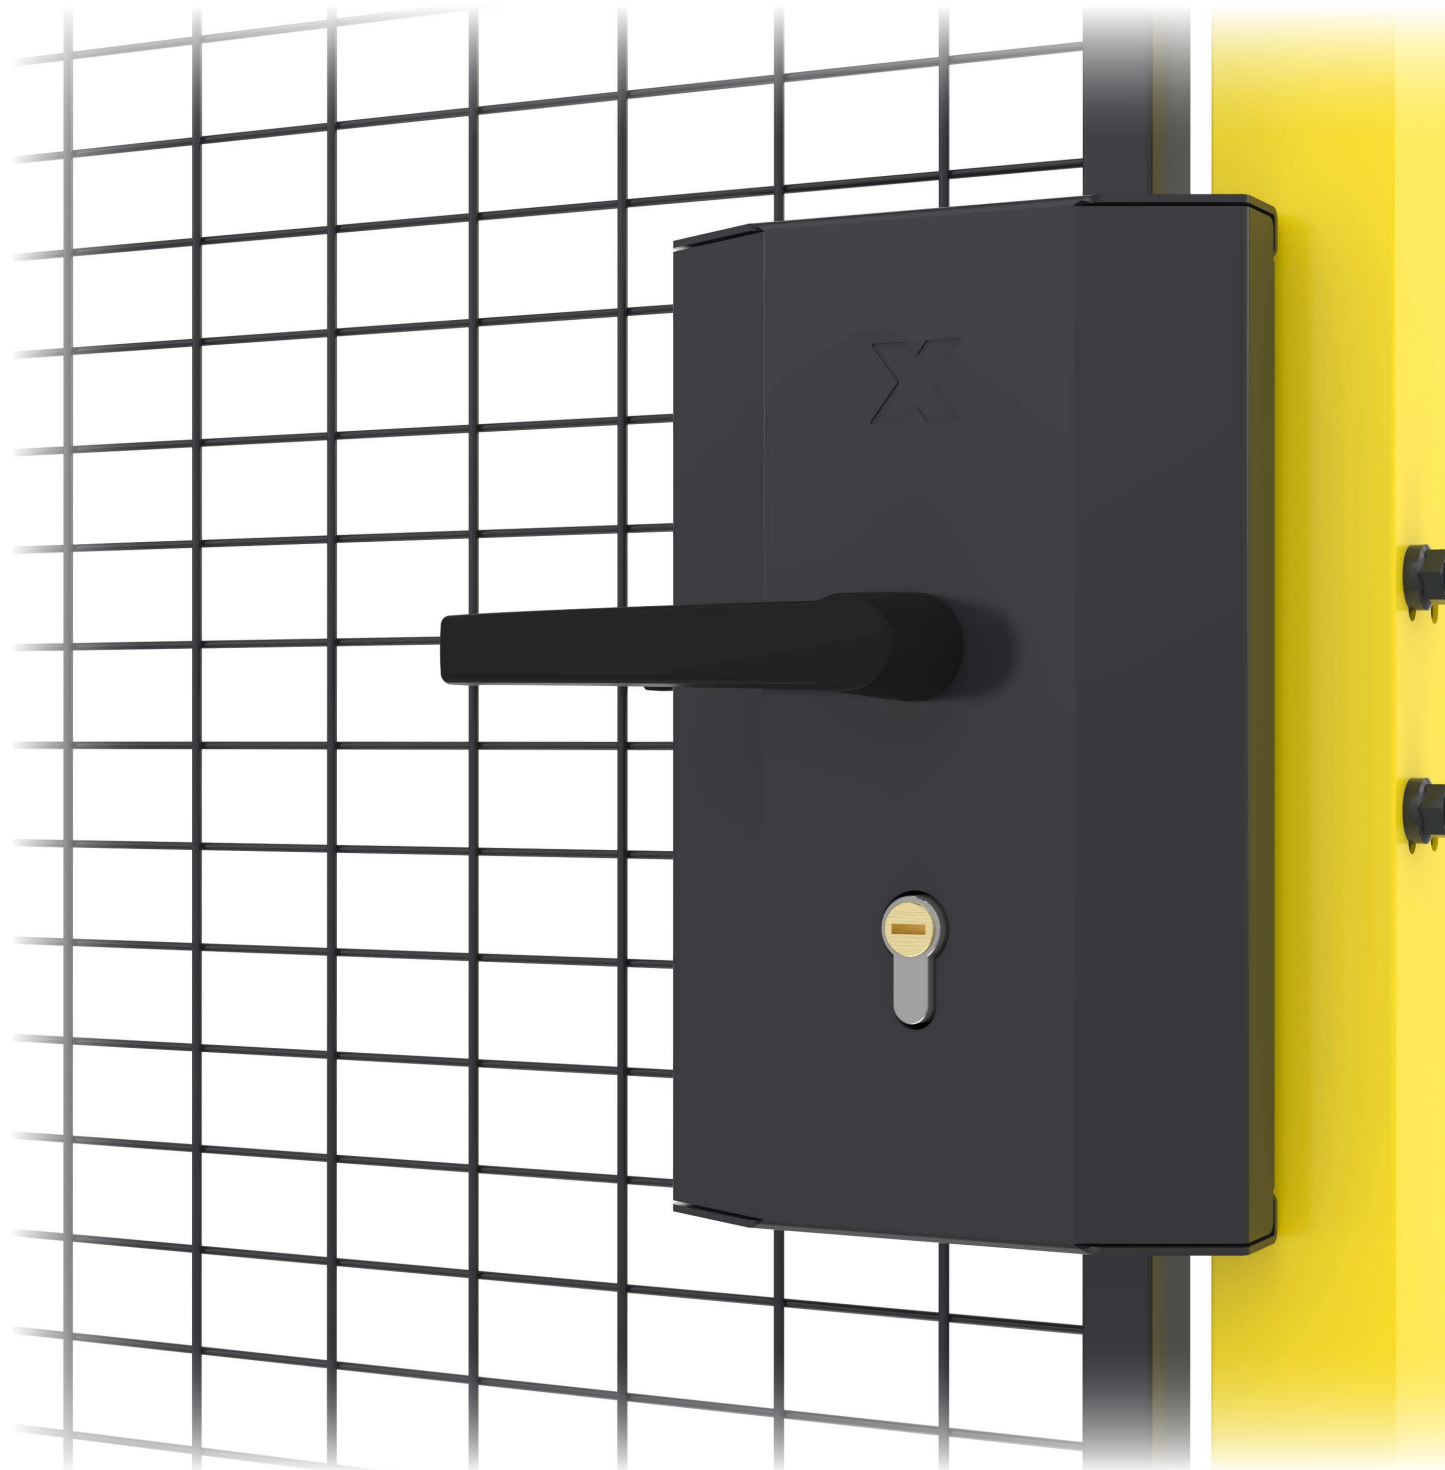


L11-10-01




A
x1



B
x1




C
x1




D
x1





E
x1




F
x2




G
x2




H (8x65)
x2




I (8x90)
x2




J (M8)
x2



K (8x30)
x1



L (M8)
x1



M (6x16)
x2




N (6x6)
x2




O (5x14)
x2





P (M5)
x2





3 mm
4 mm
5 mm





8 mm
13 mm

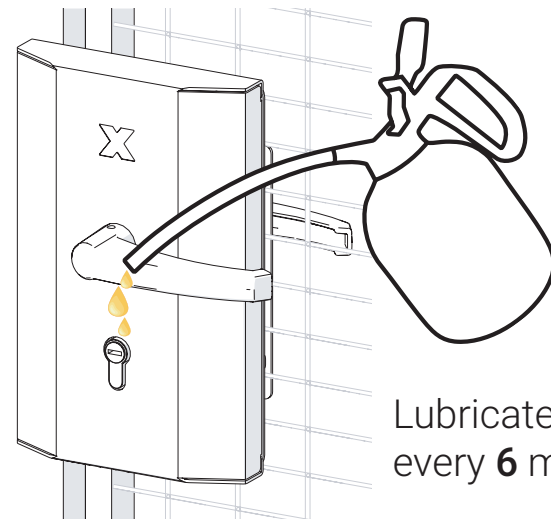



Lubricate lock
every **6** months

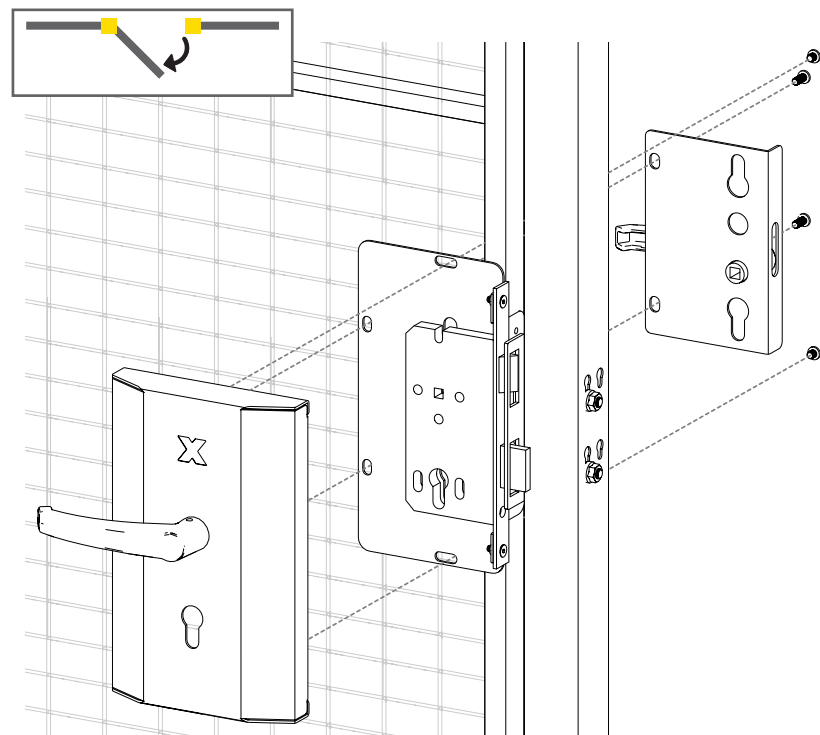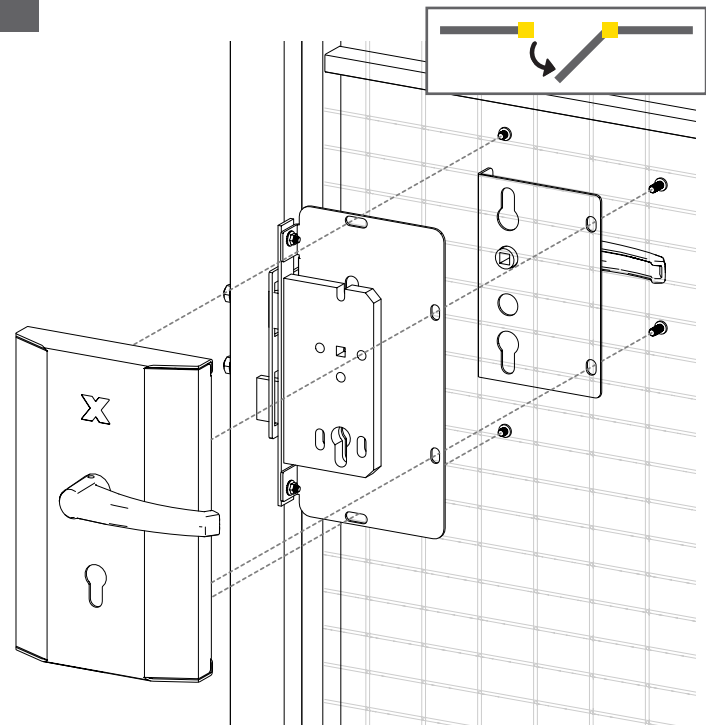



1

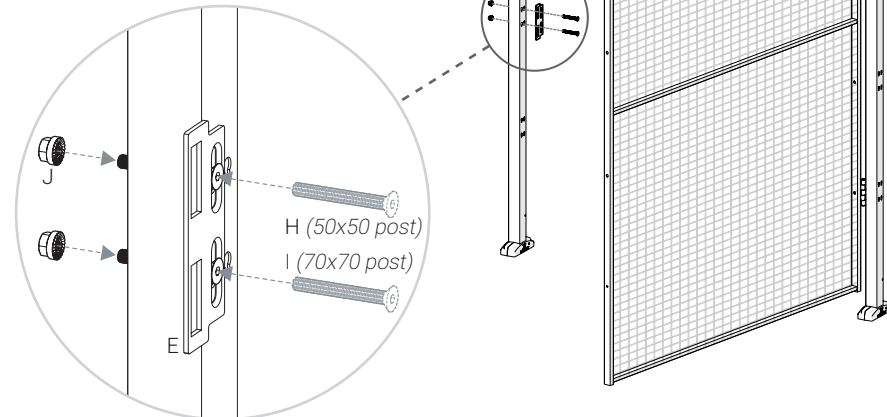

2

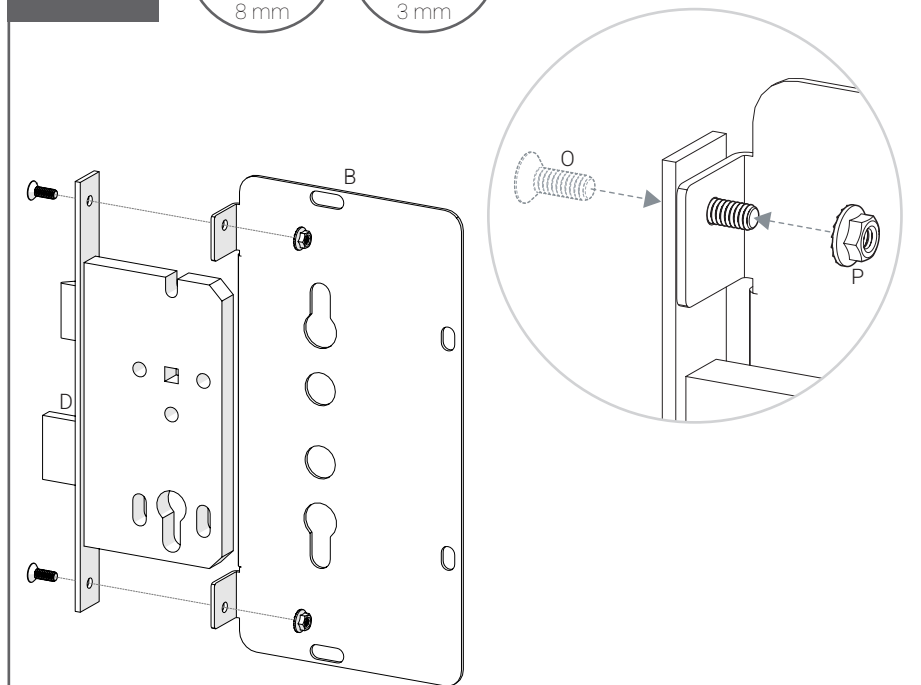

3

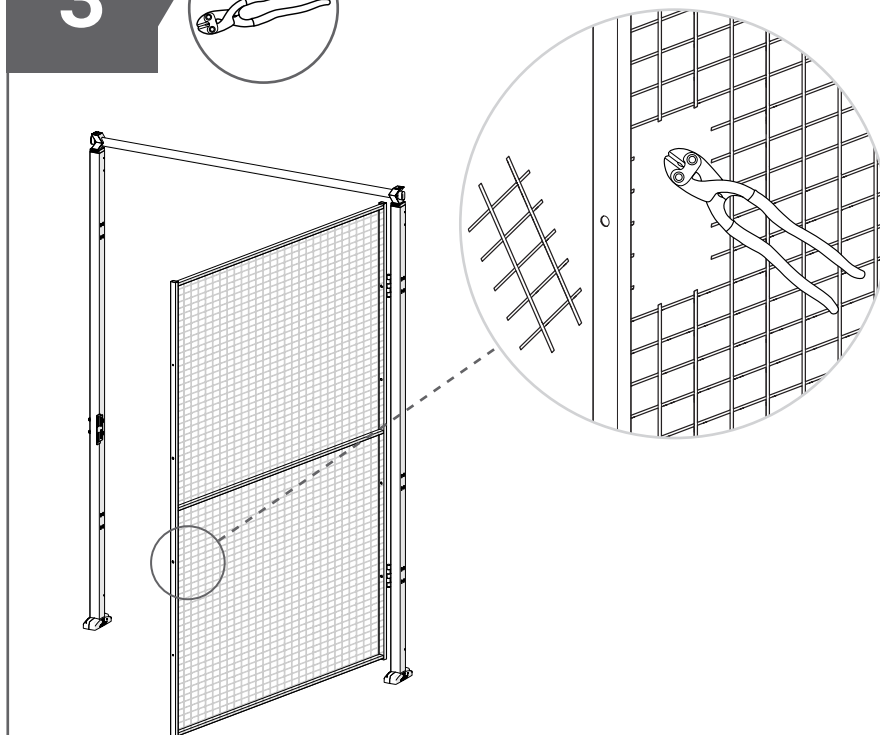

4

