
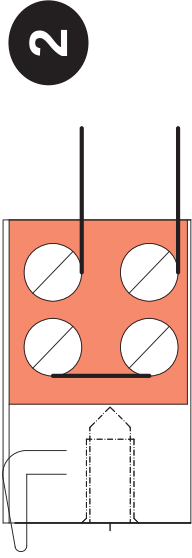


GACHE ELECTRIQUE ROUREG™ MINI
ELECTRIC STRIKE ROUREG™ MINI
ROUREG™ ELEKTRO-TÜRÖFFNER MINI
ROUREG™ DEUROPENER MINI

SEM1R

ST_SEM1R_A_091201

RACCORDMENT
CONNECTING
ANSCHLUßPLAN
AANSLUITING

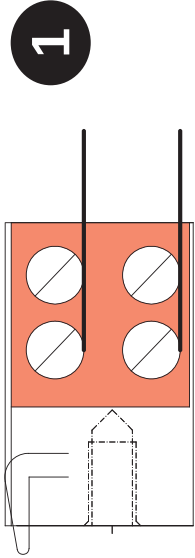

● de série / standard execution / Standardausführung / standard uitvoering
— non disponible / not available / nicht verfügbar / niet beschikbaar

mm ↔	h x l x p H x L x D H x B x T H x B x D	kg	°C	DaN	CE	
61,8 x 15,8 x 25,5 mm	0,1 kg	300° C	350 DaN			
ROUGE RED ROT ROOD						
1 ROUREG MINI A EMISSION - FAIL SECURE ARBEITSSTROM - ARBEIDSSTROOM						
MODELE MODEL MODELL						
SEM1R	—	—	1	10,2 - 13,8 V DC	V AC/DC	ImA AC/DC
			1	12 - 24 V AC		200 mA
			2	20,4 - 27,6 V DC		200 - 400 mA
			2	24 - 48 V AC		100 mA
						100 - 200 mA
				DEVERROUILLAGE IMMEDIAT SOUS PRESSION JUSQU'A : IMMEDIATE UNLOCKING UNDER LOAD UP TO : TÜRÖFFNUNG BEI EINER LAST VON BIS ZU: ONTGREDELING ONDER DRUK VAN :		
				DC = 3 DaN	AC = 12 DaN	

